

ANALYSIS OF LEVELING CONTAINER FIELD AT TANJUNG MAS PORT, SEMARANG BASED ON THE BRITISH PORT ASSOCIATION METHOD

Agus Muldyanto¹ and Adolf Situmorang²

^{1,2}Civil Engineering Departement, Universitas Semarang
Jalan Sukarno Hatta, Central Java 50196, Indonesia

ABSTRACT: *The increasing growth of container flows at the Semarang Container Terminal which encourages the economy in the city of Semarang and its surroundings. For this reason, it is necessary to have a stacking field other than a large one, also the stacking field is not flooded so that container loading and unloading operations can run smoothly. There are several CY fields (Container Yard/CY) in Tanjung Mas Port, namely Cy-01 to CY-03). CY-01 and CY-02 are relatively newer so that their position is higher than CY-03, so CY-03 needs to be raised in the pavement. The function of CY-03 in addition to container stacking is also a long room whose function is to check the contents of containers that are considered suspicious, so CY-03 needs to be safe against puddles due to rain or high tide. To calculate the elevation of the field, the method from the British Association Ports is used according to the need to be able to withstand the load of the Reach Stacker (RS) transportation equipment and its cargo, namely a durable container according to the plan which is for 30 years. In this study, apart from the hospital load and the container, the dynamic load resulting from the movement of the hospital and the container as well as when placing the container in the stacking yard is also taken into account, so it is hoped that the results will be as planned, safe, strong and effective.*

KEY WORD: Container Yard, Reach Stacker, British Association Ports

INTRODUCTION

The container terminal is located in the Tanjung Mas port area, Semarang, with a container pier size of 495 m long, 25 m wide and -11 m deep (MLWS), with a container yard (CY) of 18.7 hectares consisting of CY- 01 to CY-03, for CY-03 the area is ± 2 Ha.

CY-2 and CY-03 are located side by side separated by a road, the height of CY-02 is higher than CY-03, the height difference is ± 1.40 m, this is when it rains quite heavily and for a long time or high tide then most of the CY -03 flooded. The function of CY-03 other than for container stacking with 4 tier stacking, is for inspection of container contents by customs and excise officers, where if the contents of the container are doubtful/dangerous.

Especially for CY-03, a Long Room is provided, which is a room for checking chests that are protected from weather, dark and safe. The equipment facilities that operate here include

types such as Reach Stacker (RS) with a capacity of 45 tons, Truck Trailers and Forklifts with a capacity of 5 tons.

Considering the role of ports in supporting the regional and national economy, it is necessary to provide a variety of services for loading and unloading goods and container stacking that are effective and safe.

This study plans the thickness of the pavement for container stacking areas, as a development of knowledge and contribution of ideas for the elevation of container stacking areas, especially CY-03, at the Container Terminal of Tanjung Mas Port, Semarang.

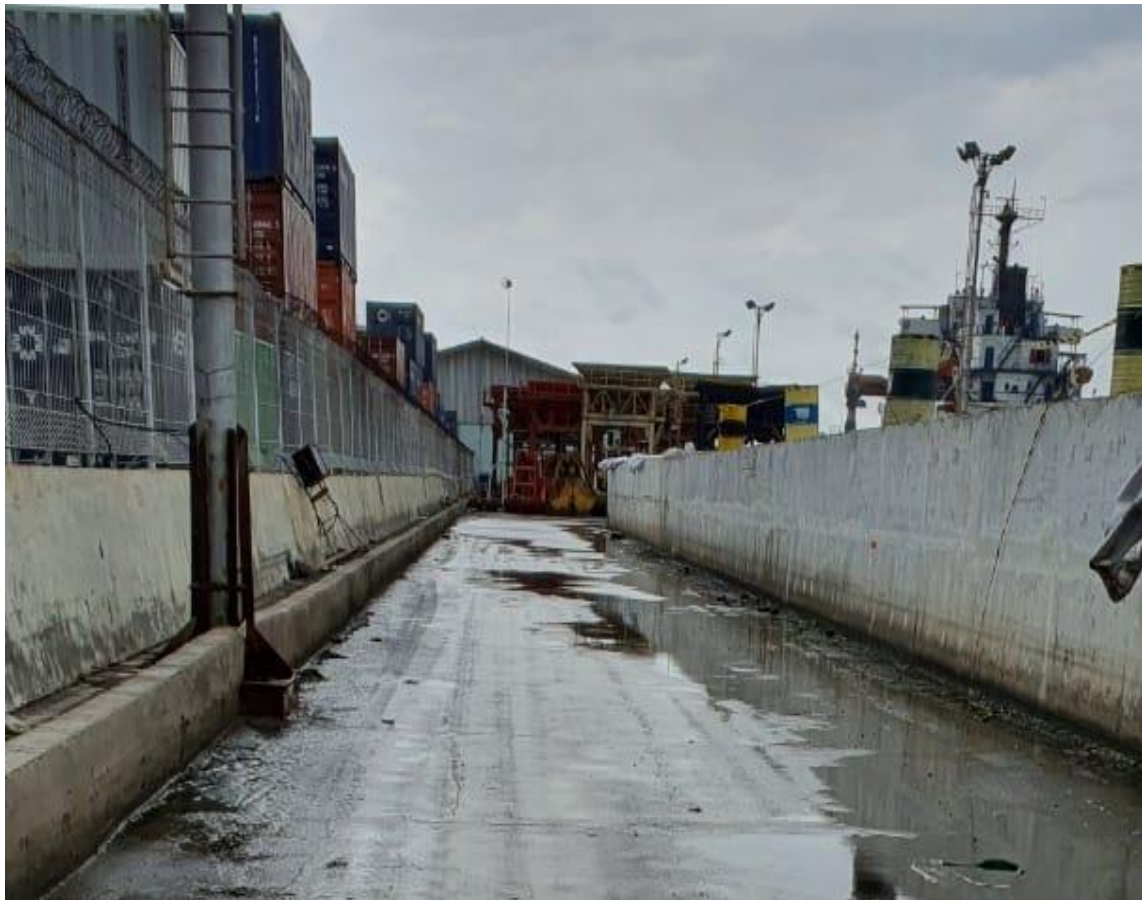


Figure. 1 CY-03 *Exiting Conditio*

RESEARCH METHOD

The research method according to Andi (2016), research methodology is a strategy in collecting and analyzing data needed according to research objectives so that they can reveal objective truth in a scientific way.

Research sites

The research location will be carried out at the Tanjung Mas Port Container Terminal, Semarang City. The selection of this location is based on the existing problems and in the context of collecting primary and secondary data.

Research Stages

Stage I

The primary data in this study were obtained from the results of the field CBR and CPT tests, which were later used to select the charts found in the British Port Association (The Structural Design of Heavy-duty Pavement for Ports and Other Industries), to determine the thickness of the pavement layer in the container field. secondary data include; equipment operating in the container yard and the number of containers and contours were obtained from Pelindo III Semarang Branch.

Stage II

Based on stage I, primary data is used later to determine pavement thickness according to the British Port Association (The Structural Design of Heavy-duty Pavement for Ports and Other Industries) and secondary data is analyzed to determine the maximum load that occurs that affects the container yard.

Stage III

From the results of Phase II, it is then analyzed the influence of dynamic loads due to the load of the Reach Stacker (RS) and containers when traveling and when placing containers.

Stage IV

From the results of the dynamic load, it is planned that the pavement will be able to match the design life, which is for the next 30 years.

RESEARCH RESULT

Calculation of Pavement Backfill

This pavement planning will refer to the British Port Association (The Structural Design of Heavy Duty Pavements for Ports and Other Industries). The stacking field, in this case the pavement, is planned to have a service life of 30 years.

The types of containers used are 20 ft (6 m x 2.5 m) with a weight of 20 tons, and 40 ft (12 m x 2.5 m) with a maximum weight of 35 tons. The planned container stack is 4 tiers. The loading and unloading equipment used are: Reach Stacker and Road Trailer.

Calculation of Existing Load Analysis

Reach Stacker Tool Load Calculation

Table 1. Calculation of Damage Effect Value with Variation in Container Weight (Wc)

Wc	W ₁	W ₂	D _{manjang}	D _{intang}	D _{used}	Distribution	Proportional Damaging
(kg)	(kg)	(kg)	DAMAGE	DAMAGE	DAMAGE	10/60	Effect
0	7119	34203	59,18	60,89	60,89	0,00	0,00
1000	7613	33914	57,43	59,63	59,63	0,00	0,00
2000	8107	33626	55,74	58,53	58,53	0,28	16,39
3000	8601	33337	54,12	57,60	57,60	0,89	51,27
4000	9096	33049	52,56	56,85	56,85	1,84	104,61
5000	9590	32760	51,07	56,30	56,30	2,59	145,82
6000	10084	32472	49,64	55,96	55,96	2,76	154,45
7000	10578	32183	48,28	55,85	55,85	2,93	163,63
8000	11073	31895	47,00	55,97	55,97	3,27	183,03
9000	11567	31606	45,79	56,36	56,36	3,17	178,65
10000	12061	31318	44,65	57,02	57,02	3,52	200,70
11000	12556	31029	43,59	57,97	57,97	4,20	243,47
12000	13050	30740	42,61	59,23	59,23	4,99	295,56
13000	13544	30452	41,72	60,82	60,82	4,69	285,25
14000	14038	30163	40,91	62,76	62,76	5,14	322,58
15000	14533	29875	40,18	65,06	65,06	5,29	344,19
16000	15027	29586	39,55	67,76	67,76	5,76	390,28
17000	15521	29298	39,02	70,86	70,86	5,91	418,78
18000	16015	29009	38,57	74,39	74,39	6,10	453,78
19000	16510	28721	38,23	78,37	78,37	6,98	547,04
20000	17004	28432	37,99	82,83	82,83	8,58	710,67
21000	17498	28144	37,86	87,78	87,78	8,19	718,93
22000	17992	27855	37,84	93,25	93,25	6,43	599,62
23000	18487	27567	37,92	99,27	99,27	3,69	366,31
24000	18981	27278	38,13	105,86	105,86	1,25	132,32
25000	19475	26990	38,45	113,03	113,03	0,47	53,13
26000	19969	26701	38,90	120,83	120,83	0,27	32,62
27000	20464	26413	39,47	129,27	129,27	0,29	37,49
28000	20958	26124	40,18	138,38	138,38	0,21	29,06
29000	21452	25836	41,02	148,19	148,19	0,17	25,19
30000	21946	25547	42,00	158,73	158,73	0,11	17,46
31000	22441	25259	43,12	170,01	170,01	0,01	1,70
32000	22935	24970	44,38	182,08	182,08	0,01	1,82
33000	23429	24682	45,80	194,96	194,96	0,00	0,00
34000	23923	24393	47,37	208,68	208,68	0,02	4,17
35000	24418	24105	49,11	223,27	223,27	0,02	4,47
							7234,45

Average Damaging Effect = 7234,45/ 100 = 72,345

Maksimum Proportional Damaging effect = 718,930

Critical Damage Effect = 87,781

Unladen Damage Effect = 60,888

Determination of Load Classification Index (LCI) Value

Calculation of Design Life (L)

$$L = \frac{\text{Total number of plant movements} \times \text{average damaging effect}}{\text{critical damaging effect}}$$

$$L = \frac{50 \text{ tahun} \times 52 \text{ minggu} \times 931 \times 72,345}{87,781}$$

$$= 1.994.945,45 \text{ trip}$$

$$= 1,99 \times 10^6 \text{ trip}$$

High Truck Vehicle Load CalculationRoad Trailer Spesification :

Tipe : Hino

Empty weight of road trailer:

- front axle (U_1) = 3.000 kg- middle axle (U_2) = 850 kg- rear axle (U_3) = 500 kgNumber of wheels of road trailer: - front axle (M_1) = 2 bh- middle axle (M_2) = 4 bh- rear axle (M_3) = 8 bhContainer weight (W_c) = 35,0 tonWheel pressure (P) = 9.0 kg/cm²

Distance between axles = 2.0 m

Dinamik Factor (f_D) = 1.1 (assumptions during braking) $X_B = 2.5$; $X_C = 8$; $X_2 = 3.0$; $X_3 = 11.0$;

$$A = \frac{X_c}{X_3} = \frac{8}{11} = 0,73 ;$$

$$B = \frac{X_B}{X_2} = \frac{2,5}{3,0} = 0,83$$

Wheel Load :

For containers weighing 35,000 kg

$$W_1 = f_D \times \left(W_c \times \frac{(1-A) \times (1-B)}{M_1} + U_1 \right) \times \text{number of wheels in one side}$$

$$= 1,1 \times \left(35.000 \times \frac{(1-0,73) \times (1-0,83)}{2} + 3.000 \right) \times 1$$

$$= 4.175 \text{ kg}$$

$$W_2 = \left(W_c \times \frac{(1-A) \times B}{M_2} + U_2 \right) \times \text{jumlah roda dalam satu sisi}$$

$$= \left(35.000 \times \frac{(1-0,73) \times 0,83}{8} + 450 \right) \times 4$$

$$= 5.677,27 \text{ kg}$$

$$W_3 = \left(W_c \times \frac{A}{M_3} + U_3 \right) \times \text{jumlah roda dalam satu sisi}$$

$$= \left(35.000 \times \frac{0,73}{8} + 500 \right) \times 4$$

$$= 13.927,27 \text{ kg}$$

Damaging Effect :

For containers weighing 35,000 kg

$$d_1 = \left(\frac{W_1}{12.000} \right)^{3,75} \times \left(\frac{P}{0,8} \right)^{1,25}$$

$$\begin{aligned}
 &= \left(\frac{4.175}{12.000} \right)^{3.75} \times \left(\frac{0,9}{0,8} \right)^{1.25} \\
 &= 0,02 \text{ PAWLS} \\
 d_2 &= \left(\frac{5.677,27}{12.000} \right)^{3.75} \times \left(\frac{0,9}{0,8} \right)^{1.25} \\
 &= 0,107 \text{ PAWLS} \\
 d_3 &= \left(\frac{13.927,27}{12.000} \right)^{3.75} \times \left(\frac{0,9}{0,8} \right)^{1.25} \\
 &= 2,03 \text{ PAWLS} \\
 \rightarrow D &= (d_1 + d_2 + d_3) \times 40/60 \text{ Distribution} \\
 &= (0,02 + 0,07 + 2,03) \times 40/60 = 0,0424 \text{ PAWLS}
 \end{aligned}$$

As for the value of the effect of damage when it is not loaded (unladen damaging effect), namely $W_c = 0$ kg, and the value of the average damaging effect (average damaging effect) can be seen in the following table:

Table 2. Calculation of Damage Effect Value with Variation of Container Weight (Wc) for High Truck

Wc (Kg)	W1 (Kg)	W2 (Kg)	W3 (Kg)	d1 (PAWLS)	d2 (PAWLS)	d3 (PAWLS)	D (PAWLS)	40/60 Distribution	Proportional Damaging Effect
0	3300	1800	2000	0.009	0.001	0.001	0.012	0.00	0.00
1000	3332.083	1945.83	2325	0.009	0.001	0.002	0.013	0.00	0.00
2000	3264.167	2091.67	2650	0.009	0.002	0.004	0.014	0.28	0.00
3000	3396.25	2237.5	2975	0.010	0.002	0.006	0.019	0.89	0.02
4000	3428.33	2383.33	3300	0.011	0.003	0.009	0.022	1.84	0.04
5000	3460.42	2529.17	3625	0.011	0.003	0.013	0.027	2.59	0.07
6000	3492.5	2675	3950	0.011	0.004	0.018	0.033	2.76	0.09
7000	3524.58	2820.83	4275	0.012	0.005	0.024	0.041	2.93	0.12
8000	3556.67	2966.67	4600	0.012	0.006	0.032	0.050	3.27	0.16
9000	3588.75	3112.5	4925	0.013	0.007	0.041	0.061	3.17	0.19
10000	3620.83	3258.33	5250	0.013	0.009	0.052	0.074	3.52	0.26
11000	3652.92	3404.17	5575	0.013	0.010	0.065	0.089	4.20	0.37
12000	3685	3550	5900	0.014	0.012	0.081	0.107	4.99	0.53
13000	3717.083	3695.83	6225	0.014	0.014	0.099	0.127	4.69	0.60
14000	3749.17	3841.67	6550	0.015	0.016	0.120	0.151	5.14	0.77
15000	3781.25	3987.5	6875	0.015	0.019	0.144	0.178	5.29	0.94
16000	3813.33	4133.33	7200	0.016	0.021	0.171	0.208	5.76	1.20
17000	3845.42	4279.17	7525	0.016	0.024	0.202	0.242	5.91	1.43
18000	3877.5	4425	7850	0.017	0.028	0.236	0.281	6.10	1.71
19000	3909.58	4570.83	8175	0.017	0.031	0.275	0.323	6.89	2.23
20000	3941.67	4716.67	8500	0.018	0.035	0.318	0.371	8.58	3.18
21000	3973.75	4862.5	8825	0.018	0.039	0.366	0.424	8.19	3.47
22000	4005.83	5008.33	9150	0.019	0.044	0.420	0.482	6.45	3.10
23000	4037.92	5154.17	9475	0.020	0.049	0.478	0.547	3.69	2.02
24000	4070	5300	9800	0.020	0.054	0.543	0.617	1.25	0.77
25000	4102.083	5445.83	10125	0.021	0.060	0.613	0.694	0.47	0.33
26000	4134.17	5591.67	10450	0.021	0.066	0.691	0.778	0.27	0.21
27000	4166.25	5737.5	10775	0.022	0.073	0.775	0.869	0.29	0.25
28000	4198.33	5883.33	11100	0.023	0.080	0.866	0.969	0.21	0.20
29000	4230.42	6029.17	11425	0.023	0.088	0.965	1.076	0.17	0.18
30000	4262.5	6175	11750	0.024	0.096	1.072	1.192	0.11	0.13
31000	4294.58	6320.83	12075	0.025	0.105	1.187	1.317	0.01	0.01
32000	4326.67	6466.67	12400	0.025	0.114	1.312	1.451	0.01	0.01
33000	4358.75	6612.5	12725	0.026	0.124	1.445	1.596	0.00	0.00
34000	4390.83	6758.33	13050	0.027	0.135	1.589	1.750	0.02	0.04
35000	4422.92	6904.17	13375	0.027	0.146	1.742	1.916	0.02	0.04
								Total	24.70

So, the calculation of the value of the effect of damage can be concluded:

Nilai PAWL'S kritis = 0,424 PAWL'S

- Nilai PAWL'S rata – rata = $\frac{24,7}{100} = 0,247$ PAWL'S

- Nilai PAWL'S tanpa beban = 0,012 PAWL'S

Determination of Load Classification Index (LCI) Value

In accordance with the table for determining the value of the loading classification index (LCI) Table 2. with a critical PAWL'S value of 0.424 PAWL'S, the road trailer is classified as a class A LCI.

Calculation of Number of Repetition (N) High Truck Vehicles

The number of tool movements (trips) is as follows:

For the week it is estimated that there are 954×2 movements = 1908 container trips served by road trailers, where each trip is a full or empty container condition.

so the value of N is:

$$\begin{aligned}
 N &= \sum \frac{\text{Kumulatif Pergerakan} \times \text{PAWLS}}{\text{Maksimum PAWLS terkritik}} \\
 &= \frac{50 \text{ tahun} \times 52 \text{ Minggu} \times \left[\frac{(1908 \times 0,424) + (1908 \times 0,247)}{+ (1908 \times 0,012)} \right]}{0,424} \\
 &= 7991100 \text{ trip} \\
 &= 0,79 \times 10^7 \text{ trip}
 \end{aligned}$$

Comparison of the Force Due to the Load that Occurs

Comparative analysis of the load force is obtained by comparing the load force that occurs in the Reach Stacker to be compared with the design load that occurs on the Road Trailer. From these two comparisons, the largest / critical load value is sought to be used as a design load in finding the required pavement thickness.

From the above calculation analysis obtained:

Table 3. Comparison of Load Analysis for Reach Stacker with High Truck

Load Type	LCI	Traffic Design
Reach Stacker	G	1,99 E+06
Road Trailer	A	0.79 E+07

From the comparison table above, data is obtained that the type of analysis of the Reach Stacker load is greater / critical when compared to the road trailer so that it is used as a reference for calculations.

Flexible Pavement Layer Design

This pavement planning will refer to the British Port Association (The Structural Design of Heavy-Duty Pavements for Ports and Other Industries).

- *Tebal concrete block* = 10 cm, f'_c 40 Mpa.
- *Bedding sand*, d = 5 cm.
- CTB, d = 30 cm
- *Base Course* layer
- *Sub Grade*, minimal CBR 30 %.

From the British Port Association Chart (*The Structural Design of Heavy Duty Pavements for Ports and Other Industries*) :

From the graph 80 mm BLOCKS Sub Base 600 mm CBR 30 %

Reach Stacker tool load:

CTB thickness : 29 cm

Sub base thickness : 60 cm

High Truck tool load:

CTB thickness : 17 cm

Sub base thickness : 60 cm

From the graph above, 80 mm BLOCKS Sub Base 600 mm CBR 30% CTB is used with a thickness of 30 cm and a sub base of 60 cm thick.

CONCLUSIONS

From the results of the analysis above, it can be concluded that the provisional results are as follows:

- The value of the CBR used is 30%, because the embankment is on a soil that already has a pavement layer.
- The maximum calculated vehicle load is the result of the Reach Stracker tool.

-The pile layer obtained as a result of the Reach Stacker is in the form of a 60 cm thick sub base with type B base course material, and the base layer using 30 cm thick CTB material.

-For paving blocks 8 cm thick is used, with K-500 concrete quality.

-From the results of dynamic analysis and referring to the existing soil conditions, it is necessary to add a pile at the end of the pier with a batter pile type so that the deflection that occurs is smaller.

References

- , The structural Design Of Heavy Duty Pavemens for Ports and other Industries, British Ports Association, 1982.
- Alyona Lovska and Oleksij Fomin (2020), *Dynamic Load and Strength Determination of Carrying Structure of Wagons Transported by Ferries*, Journal of Marine Science and Engineering.
- Andi Prastowo, (2016), *Memahami Metode-metode Penelitian*, Yogya : AR-Ruzz Media.
- Dimitri Muravev and Aleksander Rakhmangulov (2019), *The Introduction to System Dynamics Approach to Operational Efficiency and Sustainability of Dry Port's Main Parameters*, Sustainability Journal.
- Jialin Zhou and Zhang Xin (2017), *Static and Dynamic Load Tests of Shaft and Base Grouted Concrete Piles*, Hindawi Advances in Civil Engineering.
- Khafendi (2010), *Kajian Pemindahan Penumpukan Peti Kemas (Overbrenge) Ke Tempat Penampungan Sementara di Pelabuhan Tanjung Priok*.
- Renstra USM (2021), *Rencana Strategis Penelitian*, Lembaga Penelitian dan Pengabdian Kepada Masyarakat, USM
- SNI 8640: 2017 : *Desain Perencanaan Geoteknik*, Kementerian Pekerjaan Umum dan Perumahan Rakyat, Kemen PUPR.
- Vivek T and Durga prasad (2016), *Analysis and Design of Marine Berthing Structure*, Int. Journal of Engineering Research and Application, ISSN : 2248-9622, Vol. 6, Issue 12
- Yogi. A.M, Budi. R, dan Elma. Y (2015), *Perencanaan Tebal Perkerasan Lahan Penumpukan Container Di PT. KBN-Marunda*, Jurnal BENTANG Vol.3 No. 2, Juli 2015.