
THE SUSTAINABILITY OF CONCESSIONING ITOBE-AJAOKUTA EXPRESSWAY TO THE PRIVATE SECTOR

Apeh Ocholi Adejoh Samuel

Department of Civil Engineering,

The Federal Polytechnic Idah, North Central, Nigeria

Email address: engrsamapeh@gmail.com

ABSTRACT: *The study focused on the Sustainability of Concessioning of Ito-be-Ajaokuta Expressway to the private sector. The methodology adopted was the traffic volume count for 30 days, which enabled me to calculate the number of vehicles for each of the six different classes of vehicle plying the road daily. The study found that a total of 78,690 vehicles use the road daily. The vehicles were categorised into six (6) different groups, and tolls to be paid allocated to each of them. From the research carried out, a total of One hundred and thirty four million, four hundred and eighty thousand, six hundred naira (#134, 480, 600), could be realised from toll charges annually. It was also found that the road is 5.05Km long and that it would cost the sum of Six hundred and eight million, four hundred and fifteen thousand, nine hundred and twenty naira (#608,415,920), to construct the road. The key objective was to analyse whether concessioning the expressway to the private sector is sustainable, that is whether the toll charges will be able to construct and maintain the road within the concession period of thirty years. The study recommends that Kogi State government could approach the African Development Bank for loan to construct this very critical road in order to alleviate the sufferings of the Nigerian people plying the road. The study concludes that the Ajaokuta-Ito-be Expressway concession project is a viable and sustainable project, and that it will increase the welfare of the people, and directly or indirectly improve the standard of living of the people, and that rehabilitating the 5.05km of Ito-be-Ajaokuta expressway will reduce environmental pollution, vehicle operating costs and travel time on the road thereby promoting economic development through improved transport services.*

KEYWORDS: Ito-be-Ajaokuta expressway, public private partnerships, sustainable infrastructure development, traffic volume count

INTRODUCTION

The enormous resources required to fund highway infrastructure projects by the government as a result of budgetary constraints, necessitates the need for government at all tiers to seek for alternative means to fund road projects. Because of this, many countries including the developed and the developing have adopted the public-private partnership (PPP) model in order to solve their highway infrastructure problems. PPP is simply defined as a synergy between the public and private sectors in the financing and development of public infrastructures. Technically, PPP is a long term contract arrangement between a public authority and a consortium of private parties based on cooperation, with the aim of providing a mechanism for developing public service provision involving significant assets or services for a long period of time, say between 20 to 30 years. The asset or service is entrusted to the private sector consortium and a part or all of the funding comes from the private sector.

Furthermore, the road users who will be charged for using the road in form of tolls should be consulted in the planning and development process of such infrastructures. Government and private investors cannot build partnerships alone without involving the people. [3] Which means among others, the need for a holistic approach, bottom-up planning and implementation, community, and Public–Private sector financial collaboration. There is every need to involve the communities in the discussion process, especially when this involves financial obligations for which they will eventually be responsible - either through some form of taxation or user toll charges.

Toll roads are not common features in Nigerian cities. The few toll roads that existed along highways were suspended over a decade ago. Even then, tariff settings were not based on economic studies. Nigerians are not used to the concept of tolls on urban roads. The development and provision of road infrastructure is capital intensive. The Federal Government of Nigeria will require US\$100bn of investment in infrastructure development over the next ten (10) years coupled with the Nigerian population growth and demands for infrastructural facilities out of which US\$14bn will be for road maintenance and development in Nigeria, [14]

1.1. Background of Study Area

1.2.

The study area is situated along Ajaokuta Interchange – Itobe Niger Bridge expressway, in Kogi state, North Central Nigeria. This particular road connects Northern Nigeria with the South Eastern Nigeria, South South, and even part of South western Nigeria.

It lies between longitude 6°40E and 6°48E and Latitude 7°22N and 7°30N (Figure 1). The study area falls within the extreme Eastern part of the South Western basement complex of Nigeria. The basement complex consists of Ebumean granite and metamorphic rocks into which are folded Upper Proterozoic supra-crystal low grade metasediments and metavolcanic rocks forming N-S elongated belts pan-African granitoids mark the last major event and they have intrusive and/or tectonic relationships with the earlier units. Field geologic and petrographic studies of the marble and the associated rocks of Itobe area in central Nigeria show that the structures observed in the rocks include foliation, minor folds, joints and fractures. (8), The road is a dual carriageway, with two lanes on each of the carriageway, and a length of about 5.05km. The asphalt surface is in very bad condition and muddy. Torrents of rainfall, has created circular depressions of varying diameters along the road. It is a huge frustration to Nigerians of all classes plying that road, a key link between Abuja, the Federal capital territory and Southern Nigeria.

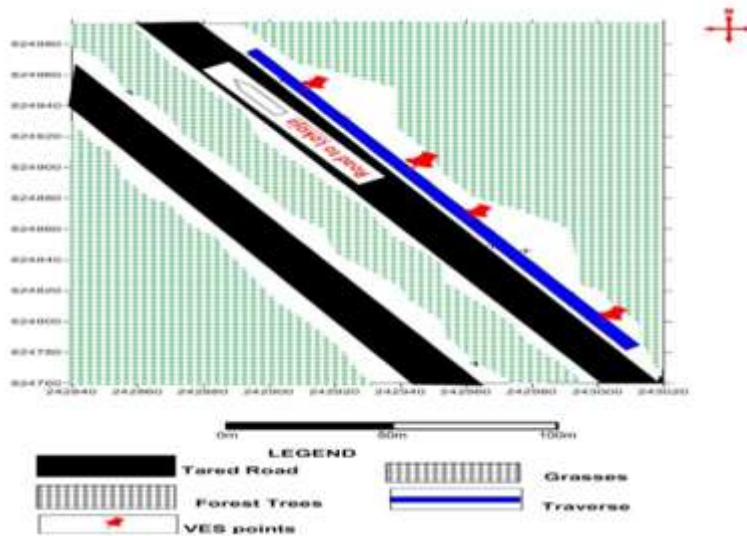


Figure 1. Basement map of the study area.

The road is a trunk 'A' road (owned by the Federal Government of Nigeria), but because of the socio-economic importance of the road to Kogi state. The government of Kogi state in collaboration with the private sector is willing to rehabilitate the road to reduce the sufferings of the good people of the state.



Figure 2. Failed Portion of Itoke-Ajaokuta Expressway.



Figure 3. Failed portion of Itoke-Ajaokuta Expressway.

1.2. Aim of Study

The main aim of this research is the need to reduce the global infrastructure deficit and rescue infrastructure sustainability crises, especially in the developing countries such as Nigeria where there is paucity of fund and dwindling managerial capacity of the public sector, rendering sole dependency on public funding and conventional procurement methods inadequate.

Objectives of Study

The broader objective of the study is to provide improved and sustainable access to economic opportunities and social services, and to enhance the capacity of relevant government institutions to deliver infrastructural development targets and subsequently, to enhance the socio-economic development of the State. Moreover, at completion, the road is expected to serve as a link between the Federal capital territory and Southern Nigeria. It thus has enormous potentials for increasing economic activities capable of enhancing income generating capacity, and revenue and employment generation for the region.

Statement of Problem

In the past the government has been the sole financier of infrastructure finance and has often taken responsibility for implementation, operations and maintenance as well. There is a gradual recognition that this may not be the best way to execute or finance these projects. This recognition is based on considerations such as cost efficiency, equity considerations, and fiscal prudence. It is against the strength of these arguments that the author has accepted the fact that for a sustainable transport infrastructure development in Nigeria, the public sector must collaborate with the private sector, in view of the dwindling budgetary provisions for road development in Nigeria.

Project Rationale and Need

The project will support economic and social development programmes of Kogi State and Nigeria as a whole through efficient and cost-effective movement of passengers and freight, especially agricultural produce. Rehabilitating the 5.05km of Itobe-Ajaokuta expressway will reduce environmental pollution, vehicle operating costs and travel time on the road thereby promoting economic development through improved transport services. The concessioning period is thirty (30) years.

LITERATURE REVIEW

Nigerian Road Transport Infrastructure

Road is an important infrastructure in a nation or community of people. It greatly affects the economy of any nation [13]. Roads must be properly designed and constructed. After construction, they need to be maintained to ensure that the objective of safety, strength and durability are met. Failures on Nigerian roads, major and minor, had become a normal thing to the Nigerian populace. Road failure leads to accidents on Nigerian roads [1]. Many newly constructed and rehabilitated roads in the country do not last long enough before failure. Roads are built to provide safe passage of vehicles and must be properly designed and constructed. After construction, there arise need for appropriate maintenance for the road to attain its design life and to ensure that the objectives of safety, strength and durability are met. The rate at which roads deteriorates in service ranges from the quality of materials used, workmanship standard and to the quality of design and supervision during the road construction [7].

Nigeria has about 200,000 km of roads spread all over the country, these roads are made up of over 32,000 km of federal roads spread over the thirty-six states and the federal capital, over 30,000 km of state roads and over 130,000 km of local government roads". Within the states, the local government roads are further classified into urban and rural roads. According to ownership, Nigerian roads are classified into federal, state, and local government roads, [14]. Federal roads are divided into federal trunk 'A' roads and the federal trunk 'F' roads. The federal trunk 'A' roads are those under the federal government ownership and they are developed and maintained by the federal government while the federal trunk 'F' roads are those that were formerly under the state ownership but were taken over by the federal government with a view to upgrading them to federal highway standards. State roads are classified as the state trunk 'B' roads and are under the ownership and management of the various state governments. Local roads classified as the local government trunk 'C' roads and are the roads under the ownership and management of the local governments in the country. These roads are divided into the urban, rural and village access roads [14].

The Structure of Nigeria Road Networks

The distribution of Nigeria road network is 17%, 16% and 67% (figure 1) for Federal, State and Local governments respectively. Although the Federal roads account for only 17% of the total network size, they carry the heaviest volume of traffic estimated at well over 70% (figure 2) and 90% of socio-economic activities in the country. The Federal highways are the main trunk routes linking all the thirty six states and the Federal Capital Territory, Abuja as well as leading to the main sea ports of the nation [10, 15].

Nigeria's transport infrastructure stock is inadequate for the size of the economy and constitutes a major cost and constraint for both large and small businesses. It lags behind its peers in terms of scale (i.e., road and rail density) and quality [17]. Nigeria can only boast of 22km of roads per every 100,000 km²; compared with India, South Africa, and Kenya which have 158km, 62km, and 28km respectively of roads per 100,000 km². For the rail subsector, Nigeria until recently had only 4km of rail per every 1,000 square km compared to India, South Africa, and Kenya, which have 23km, 17km, and 6km respectively of rails per 1,000 km². With more than 90% of freight and passengers carried by the roads, Nigeria's road network is highly overused, leading to rapid deterioration. The railways, which catered for about 60%, freight movement at independence, now account for less than 1% land transportation in the country. The country's transport problem is exacerbated by the near total lack of maintenance of the road network at all tiers of Government (Federal, State, and Local Government) [16].

Ownership Structure

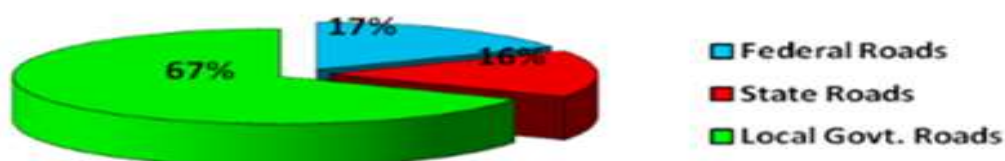


Figure 4. Ownership structure of Nigeria Roads Network (FERMA, 2018) [7].

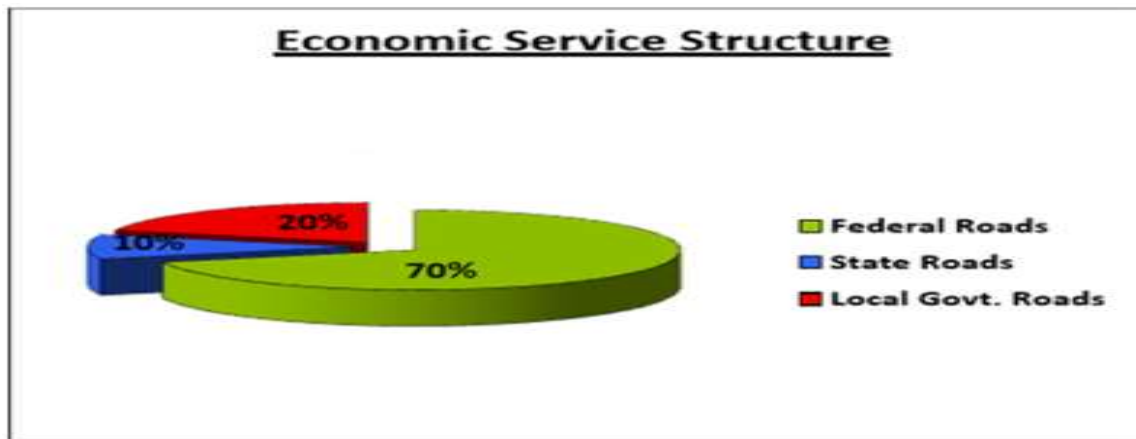


Figure 5. Economic service structure of Nigeria Roads Network (FERMA, 2018) [7].

Public Private Partnership Prospects in Achieving Sustainable Highways in Nigeria

Public Private Partnership (PPP) is defined as “a contractual arrangement between a public sector agency and private sector concern, whereby resources and risks are shared for the purpose of delivering a public service, or for developing public infrastructure.” [9, 12]. In highway PPP, the private sector consortium designs, builds, finances, and operates the highways for government to pay for its use (Availability Payment) or User pay (Toll). The User pay (Toll) is the method being proposed for the Ajaokuta-Itobe expressway.

The development and provision of road infrastructure in Nigeria has primarily been through the traditional forms of procurement strategies by the federal, state, and local governments through budgetary allocations and donor-financed loans and grants, this leaves the Nigerian road infrastructure in a precarious situation [11]. But in recent time, with the demand for the development of more road infrastructure due to population explosion and urban-rural migration, coupled with financial crisis as a result of global economic meltdown, the federal government of Nigeria is now seeking collaboration with the private sectors in the development of road infrastructure facilities through public-private partnership (PPP). [9].

It was estimated that annual infrastructure investment of between 6 billion and 9 billion US Dollars is required to resuscitate road infrastructure in Nigeria, which cannot be provided by the government alone except through partnering with the private sector [2]. Road projects attract a meagre 18-24% cash backing resulting in a huge budget deficit [4].

MATERIALS AND METHOD

The methodology adopted was the traffic volume count for 30 days, which enabled me to calculate the number of vehicles for each of the six different classes of vehicle plying the road daily. To determine the traffic volume, field assistants were strategically stationed in various locations at different hours of the day, for 30 days, to take count of the volume of traffic. Based on this, a traffic volume of 78,690 vehicles per day was estimated. The route serves both intra-city and intercity traffic. The vehicles were categorised into six (6) different groups, based on tolls to be paid. A total of One hundred and thirty four million, four hundred and eighty thousand, six hundred naira (#134, 480, 600), could be realised from toll charges annually. It was also found that the road is 5.05Km long and that it would cost the sum of Six hundred and

eight million, four hundred and fifteen thousand, nine hundred and twenty naira (#608,415,920), to construct the road. The project will be able to sustain itself within the concession period. The study assumes that the number of vehicles will increase annually; motorcycles by 10%, cars by 5%, Buses by 3% and trucks by 2%. This information is based on the observed changes in the flow of traffic over time, and projected economic activities along this corridor. At the moment, two thriving manufacturing companies, West African Ceramics Limited, and Royal Engineered Stones Limited, with employees running into thousands are operating on this corridor, and many other companies are springing up, making this particular corridor the future industrial hub of kogi state.

Table 1. Traffic Count on Ajaokuta-Itobe Expressway.

Table 1. Traffic Count on Ajaokuta-Itobe Expressway.

Days	Class A	Class I	Class IIIA	Class III	Class IV	Class II
	Motorcycles	Saloon cars & tricycles	Commercial buses	Light trucks & 2-axle trucks	Heavy trucks & 2 or more heavy (loaded) axles	Mini buses & pick up vehicles
1	581	502	271	164	306	97
2	573	486	283	173	294	76
3	563	521	274	180	323	86
4	490	482	271	178	326	69
5	504	503	290	192	286	71
6	597	490	272	162	295	91
7	543	589	264	173	331	81
8	563	671	256	102	332	87
9	532	587	275	124	341	48
10	521	604	281	141	407	74
11	587	573	246	153	421	65
12	561	625	271	206	381	124
13	671	658	268	123	330	118
14	654	751	289	156	386	132
15	598	608	301	202	401	125
16	789	684	397	173	380	142
17	765	690	401	164	390	103
18	678	586	254	268	403	101
19	673	581	272	294	379	87
20	596	576	198	306	463	95
21	1011	710	259	209	483	152
22	635	731	282	151	440	64
23	1015	2006	795	655	857	125
24	953	2098	850	305	971	166
25	841	4065	2088	264	779	430
26	1016	3041	2043	103	684	313
27	203	602	180	147	218	120
28	190	569	165	136	102	76

Days	Class A	Class I	Class IIIA	Class III	Class IV	Class II
	Motorcycles	Saloon cars & tricycles	Commercial buses	Light trucks & 2-axle trucks	Heavy trucks & 2 or more heavy (loaded) axles	Mini buses & pick up vehicles
29	789	561	248	147	441	67
Total	18,692	26,150	12,544	5769	12,150	3,385

Total traffic volume per day is $18,692+26,150+12,544+5769+12,150+3,385=78,690$ vehicles.

Table 2. Classes of vehicle and the proposed toll tariff.

Vehicle class	Description	Toll (#)
Class A	Motorcycles	$50 \times 18,692 = 904,600$
Class I	Saloon cars and tricycles	$100 \times 26,150 = 2,615,000$
Class II	Mini buses, pick-up trucks	$150 \times 3,385 = 507,750$
Class IIIA	Commercial buses	$200 \times 12,544 = 2,508,800$
Class III	Light trucks and 2-axle buses	$250 \times 5,769 = 1,442,250$
Class IV	Heavy trucks and 2 or more axle trucks	$300 \times 12,150 = 3,645,000$
		Total=#11,623,400/month

Table 3. Projected Revenue.

Total amount realisable from tolls	Period
#11,623,400	1 month
#138,480,600	1 year
#2,077,209,000	15 years
#2,769,612,000	20 years
#4,154,418,000	30 years

Table 4. Rough estimate for the repair of 1Km repair of road in Nigeria.

S/N	Description	Unit	Quantity	Rate	Amount
1	Site clearance 1Km=1,000m 1000×16m (width)=16,000m 16,000/10,000=1.6HA	HA	1.6	550,000	880,000
2	Earthworks – Cut to spoil Depth=1m Width=14m Length=1Km=1,000m.=1x14x1000=14000	M ³	14,000	950	13,300,000
3	Earthworks – Borrow to fill Depth – 1m Width - 14m Length	M ³	14,000	1150	16,100,000
		—			

S/ N	Description	Unit	Quantity	Rate	Amount
4	1000m=1Km=1x14x1000=14000 Sub base Depth=0.20 Width=12.80 Length=1000 $1000 \times 0.2 \times 12.80 = 2,560$	M ³	2,560	3,200	8,192,000
5	Stone-base -1000x0.2x12.80	M ²	2,560	6,940	17,766,400
6	Prime coat-7.3x1000=7,300	M ²	7,300	550	4,015,000
7	Asphaltic Binder Course	M ²	7,300	4500	32,850,000
8	Tack coat	M ²	7,300	250	1,825,000
9	Asphaltic Concrete Wearing Course	M ²	7,300	3500	25,550,000
					120,478.40 0

It would cost #120,478,400 to repair one KM of road in Nigeria. So for the Ajaokuta-Itoke road that is 5.05km, the total cost of rehabilitating the road is $\#120,478,400 \times 5.05 = \#608,415,920$.

INTERPRETATION AND DISCUSSION OF RESULTS

The vehicles were categorised into six (6) different groups. Based on tolls to be paid, a total of One hundred and thirty four million, four hundred and eighty thousand, six hundred naira (#134, 480, 600), could be realised from toll charges annually. The total length of the road is 5.05Km and it would cost the sum of Six hundred and eight million, four hundred and fifteen thousand, nine hundred and twenty naira (#608,415,920), to construct the road. The study assumes that the number of vehicles will increase annually; motorcycles by 10%, cars by 5%, Buses by 3% and trucks by 2%. This information is based on the observed changes in the flow of traffic over time, and projected economic activities along the route. At the moment, two thriving manufacturing companies, West Africa Ceramics Limited, and Royal Engineered Stones Limited, with employees running into thousands are operating on this corridor, and more companies are springing up, making this particular corridor the industrial hub of kogi state, Nigeria.

RECOMMENDATIONS AND CONCLUSIONS

Recommendations

From experience, stakeholder consultation and comprehensive studies for infrastructure provision is not the norm in Nigeria, and this is the genesis of many white elephant projects in the country. It is therefore recommended that such studies should be carried out before embarking on any infrastructure project for which users will be expected to pay user charges. Application of similar studies in other Nigerian cities in the recommended manner will be of great benefit in improving infrastructure provision and economic development in the country. Transparency and stakeholder analysis and involvement will be helpful in attracting private investors [18]. Toll road projects are fraught with a lot of risks and adequate care must be taken through comprehensive socio-economic studies to minimize such. Public Private Partnerships can bring added value to the development of transport infrastructure in Nigeria, but a sound legal and regulatory framework and complete transparency particularly with regards to financial accountability are essential elements. Also important is the presence of strong

structure at the level of central administration to steer and guide policy implementation. PPPs indeed often falter because of hastily prepared tender documents and contracts and the negotiations taking place between unequally qualified and experienced professionals, mainly to the disadvantage of the representative from the public sector.

Alternatively, Kogi state government could approach the African Development Bank (AfDB) for funds, for this project, as this will reduce the cost of construction, when compared with the local commercial banks whose interest rates are so high. But because maintenance of road infrastructure is a huge challenge to the public sector. Partnering the private sector is what the author of this research recommends.

Conclusions

With the positive outcome of the feasibility studies, the provision of adequate sustainable infrastructure cannot be left in the hands of government alone. In Nigeria and other developing countries, sustainable access to road infrastructure and other socio-economic services and products can be accomplished through public-private partnerships, where the government delivers the minimum standard of services and products, while the private sector brings skills and core competencies. Donors and the business class bring funding and other resources. Such collaboration will be quite productive.

In a bid to bring about sustainable development in most countries, it is no longer sustainable for the public sector to finance the road infrastructure alone. Efficient and effective production and distribution of public goods and services should be part of the social contribution of the private sector to sustainable economic development. Private sector led economic growth and development, is generally more efficient (both productive and allocative efficiencies) and effective. The private sector is more dynamic, resilient, creative, innovative and vibrant than the public sector. But because private sector is more profit-oriented, the provision of infrastructures cannot be left alone in the hand of the private sector. Since there will still be some elements of market imperfection, that is why it is important to adopt public private partnership in the development of Ajaokuta-Itobe expressway, given the positive outcome of the feasibility studies.

References

- [1] Adams, J. O. and Adetoro A. E.(2013) Analysis of Road Pavement Failure caused by soil properties along Ado Ekiti - Akure Road. Nigeria International Journal of Novel Research in Engineering and Applied Sciences (IJNREAS) 1 (1) 2.
- [2] Afolayan, O. D, and Abidoye, A. O. (2012). Causes of failure on Nigerian Roads: A review. Journal of Advancement in Engineering and Technology.
- [3] Apeh, O. A. S. (2010). Introduction of fuel tax for road maintenance in Nigeria: A paper presented at the 4th annual National Conference of the school of General Studies, Kogi State Polytechnic Lokoja on the 29th – 2nd July, 2018.
- [4] Apeh, O. A. S, and Apeh, S. (2010). Maintenance culture and Infrastructure Development: Road Transport Infrastructure, a paper presented at the 4th annual National Conference of the school of General Studies, Kogi State Polytechnic Lokoja on the 29th – 2nd July, 2018.
- [5] Babatunde, S. O, Perera, S, Zhou, L, Udejaja, C. (2014). Barriers to public private partnership projects in developing countries. Eng. Constr. Archit. Manag. 22 (6), 669-691.

- [6] Ehonwa, J. (2013) "Important Facts about the Lekki-Epe Expressway"; Connect Nigeria, <https://www.connectnigeria.com/articles/2013/04/important-facts-about-the-lekki-epe-expressway/>.
- [7] Federal Roads Maintenance Agency, FERMA (2013a). "Current state of Nigerian Road Networks.
- [8] Imasuen O. I., Olatunji J. A. and Onyeobi T. U. S. (2017); Geological observations of basement rocks, around Ganaja, Kogi State, Nigeria, International Research Journal of Geology and Mining (IRJGM) (2276-6618) Vol. 3 (2) pp. 57-66. Journal of Engineering Research & Technology (IJERT) Vol. 1 Issue 8.
- [9] Infrastructure Concession Regulatory Commission (2017). Report on Public private sector participation in Nigeria, July, 2013.
- [10] MC Consulting (2011). "Classification of Nigerian Roads: State of Infrastructure Report on Nigerian Highways, July, 2017, pp 5-6.
- [11] Maduegbuna, N. E (2012) 'On Lekki toll road concession project'.(Businessday, Thursday, January 19) <http://businessdayonline.com/NG/index.php/analysis/commentary/31981-on-lekki-toll-road-concession-project> (accessed on 29/6/2012).
- [12] Nnanna, O. J., Odoko F. O., Alade S. O.(2017); Highway Maintenance in Nigeria, Lessons from other countries, Research Department Occasional Paper Series, Central Bank Of Nigeria.
- [13] Osulale, O. M., Oseni, A. A. and Sanni, I. A (2017). Investigation of Highway Pavement Failure along Ibadan - Iseyin Road, Oyo State, Nigeria. International.
- [14] Okigbo, N (2009), Road maintenance in Nigeria, the way forward. International journal of research in engineering science. Pan African journal series Accra Ghana.
- [15] Salem, T. (2012) 'Federal Roads Begging for Urgent Attention' Leadership Newspaper December 26, <http://leadership.ng/news/486582/federal-roads-begging-urgent-attention> (accessed on 15/02/19).
- [16] The Guardian (2018) 'State of Nigeria's Roads' The Guardian November 8, <http://guardian.ng/opinion/state-of-nigerias-roads/> (accessed on 15/12/18).
- [17] Thisday Live (2017) 'The Rush Hour? Hour Gridlock at Lekki Toll Plaza'. Thisday Live, April 15, <http://www.thisdaylive.com/articles/the-rush-hour-gridlock-at-lekki-toll-plaza/113749/> (accessed on 29/6/2017).
- [18] Thisday Live (2017) 'The Inevitability of PPP'. Thisdaylive, May 17, <https://www.thisdaylive.com/index.php/2017/05/17/the-inevitability-of-ppp/> (accessed on 18/06/2017).